


STEEL

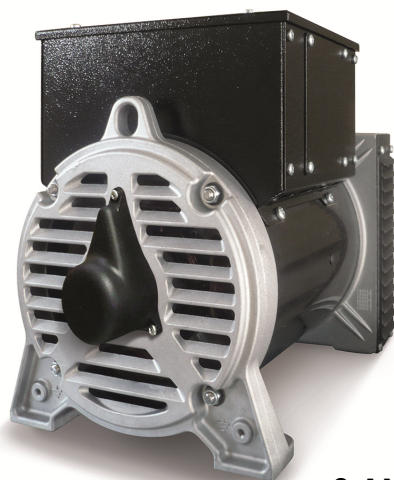

2 E 4 POLI - MONOFASE A SPAZZOLE - AVR

- > Autoregolati
- > IP 23
- > Tensione standard: 230 V - 50 Hz
- > Accoppiamenti: IM B34, IM B35, SAE
- > DIGITAL AVR

2 AND 4 POLES - SINGLE PHASE BRUSHES - AVR

- > Self-regulated
- > IP 23
- > Standard voltage: 230 V - 50 Hz
- > Couplings: IM B34, IM B35, SAE
- > DIGITAL AVR

FK/R

2 POLI - 2 POLES

model	power		η 4/4		mass
	p.f. 1		p.f. 1		
	kVA	%	kVA	%	
	50 Hz 3000 rpm		60 Hz 3600 rpm		
FKR 2 LA	15	82	18	83	63
FKR 2 LC	18.5	84	22	85	79

4 POLI - 4 POLES

model	power		power		mass
	η 4/4 p.f. = 1		η 4/4 p.f. = 1		
	kVA	%	kVA	%	
FKR 4 LC	50 Hz 1500 rpm		60 Hz 1800 rpm		Kg (approx)
	10	83	12	84	64

2 E 4 POLI - TRIFASE

- > Autoregolati
- > IP 23
- > Tensione standard: 230/400 V - 50 Hz
- > Corrente di cortocircuito superiore a 3 In (solo versioni a compound)
- > Accoppiamenti: IM B34, IM B35, SAE
- > DIGITAL AVR

2 AND 4 POLES - THREE PHASE

- > Self-regulated
- > IP 23
- > Standard voltage: 230/400 V - 50 Hz
- > Short circuit current greater than 3 In (only compound)
- > Couplings: IM B34, IM B35, SAE
- > DIGITAL AVR

FT

A SPAZZOLE - COMPOUND

2 POLI - 2 POLES

model	power η 4/4 p.f. 0,8		power η 4/4 p.f. 0,8		mass
	kVA	%	kVA	%	Kg (approx)
	50 Hz 3000 rpm		60 Hz 3600 rpm		
FT 2 LA	20	85	24	86	72
FT 2 LC	24	87	29	88	88

FT

A SPAZZOLE - COMPOUND

4 POLI - 4 POLES

model	power		power		mass
	η 4/4 p.f. 0,8		η 4/4 p.f. 0,8		
	kVA	%	kVA	%	
	50 Hz 1500 rpm	60 Hz 1800 rpm	50 Hz 1500 rpm	60 Hz 1800 rpm	
FT 4 LC	17	84	20	85	74

FT/R

A SPAZZOLE - AVR

2 POLI - 2 POLES

model	power		power		mass
	η 4/4 p.f. 0,8	η 4/4 p.f. 0,8	η 4/4 p.f. 0,8	η 4/4 p.f. 0,8	
	kVA	%	kVA	%	Kg (approx)
	50 Hz 3000 rpm		60 Hz 3600 rpm		
FTR 2 LA	20	85	24	86	66
FTR 2 LC	24	87	29	88	82


FT/R

BRUSHES - AVR

4 POLI - 4 POLES


4 POLI - 4 POLES					
model	power		power		mass
	η 4/4 p.f. 0,8		η 4/4 p.f. 0,8		
	kVA	%	kVA	%	
	50 Hz 1500 rpm		60 Hz 1800 rpm		Kg (approx)
FTR 4 LC	17	84	20	85	68

IM B34 - B3/B14

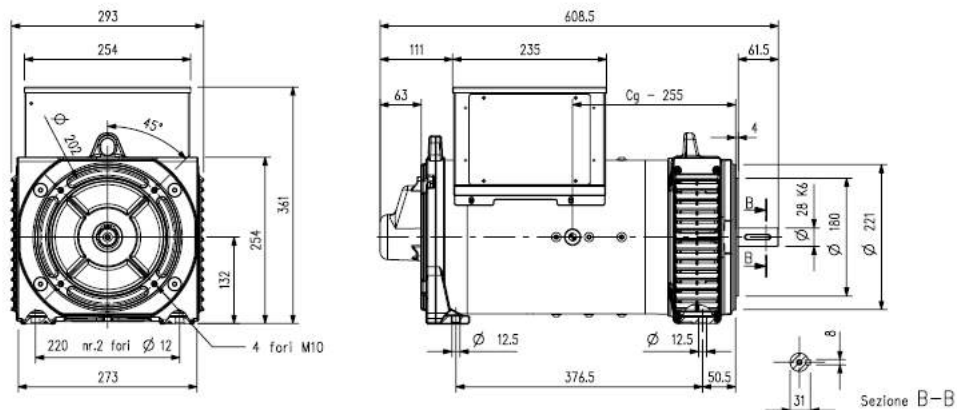


IM B35 - J609b (c25,4 / 35)

cone		shaft		flange			
	d	a	b	l	p	holes	R
25,4	25,4	63,5	48	165	146,1	4	11
35	29,4	42,2	69	197	163,6	4	11
				197	177,8	4	11

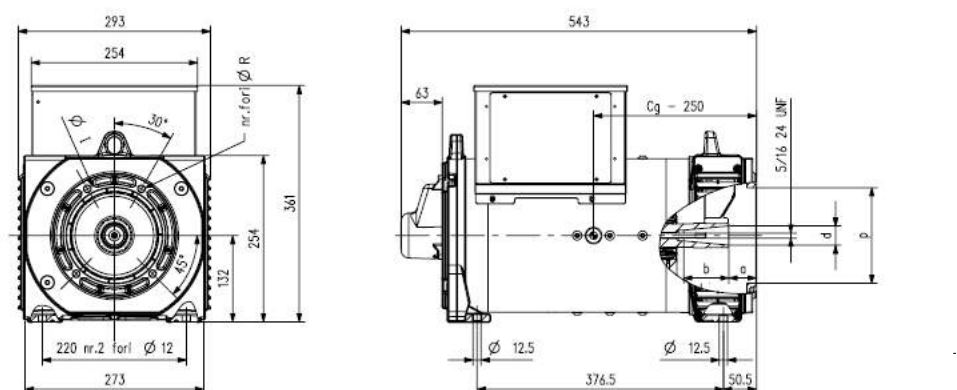

IM B35 - B3/B9 (c30 / 38)

cone	shaft			flange				
	d	a	b	l	p	holes	R	g
30	29,4	19	27	135	105	12	9	30°
38	37,4	8	37	150	125	4	12	90°

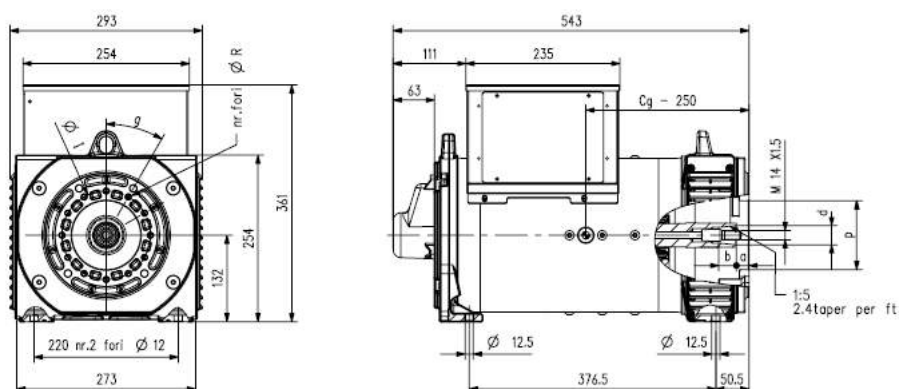

SAE5, SAE4, SAE3

disk joint	flange								
	5	4	3	L	G	I1	holes	R	S1
6,5	●	●		30,2	215,9	200	6	9	60°
7,5	●	●		30,2	241,3	222,2	8	9	45°
8	●	●	●	62	263,5	244,5	6	11	60°
10		●	●	53,8	314,3	295,3	8	11	45°
11,5			●	39,6	352,4	333,4	8	11	45°
P	314,3	362	409,6						
Q	358	405	452						
I	333,4	381	428,6						
R1	11	11	11						
S	22° 30	15°	15°						
holes	8	12	12						

