



STEEL

2 E 4 POLI - MONOFASE SENZA SPAZZOLE - CONDENSATORE

- > Autoregolati
- > IP 23
- > Tensione standard: 230 V - 50 Hz
- > Corrente di cortocircuito superiore a 3 I_n
- > Accoppiamenti: IM B34, IM B35, SAE

2 AND 4 POLES - SINGLE PHASE BRUSHLESS - CAPACITOR

- > Self-regulated
- > IP 23
- > Standard voltage: 230 V - 50 Hz
- > Short circuit current greater than 3 I_n
- > Couplings: IM B34, IM B35, SAE



2 POLI - 2 POLES

model	power		power		mass
	η 4/4		η 4/4		
	p.f. 1		p.f. 1		
	kVA	%	kVA	%	
	50 Hz 3000 rpm		60 Hz 3600 rpm		
FK 2 LA	15	82	18	83	81
FK 2 LC	18.5	84	22	85	96

4 POLI - 4 POLES



model	power		power		mass
	η 4/4	p.f. 1	η 4/4	p.f. 1	
	kVA		%		
	50 Hz 1500 rpm		60 Hz 1800 rpm		Kg (approx)
FK 4 LC	10	83	12	84	80

IM B34 - B3/B14

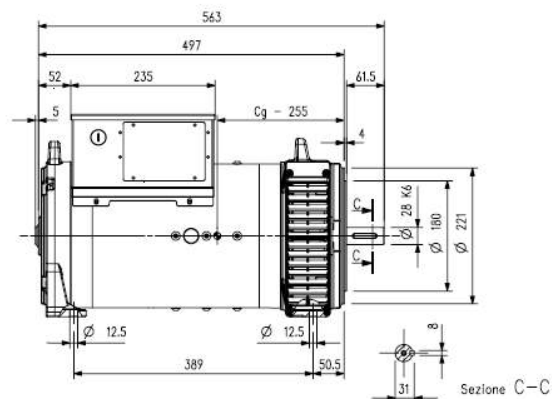



IM B35 - J609b (c25,4 / 35)

shaft				flange			
cone	d	a	b	l	p	holes	R
25,4	25,4	63,5	48	165	146,1	4	11
35	29,4	42,2	69	197	163,6	4	11
				197	177,8	4	11

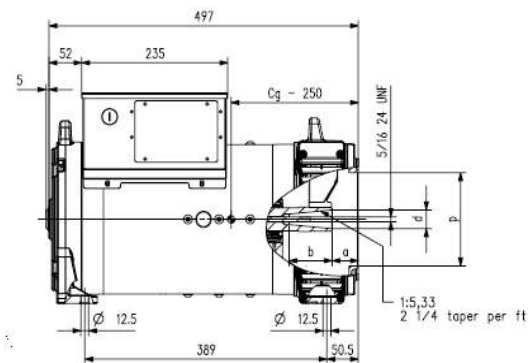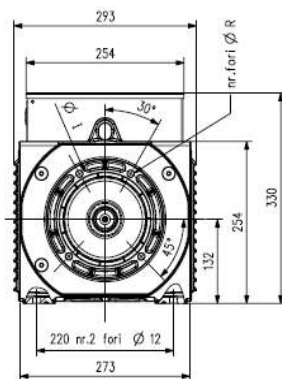



IM B35 - B3/B9 (c30 / 38)

cone	shaft	flange					
	d	a	b	l	p	holes	R
30	29,4	19	27	135	105	12	9 30°
38	37,4	8	37	150	125	4	12 90°

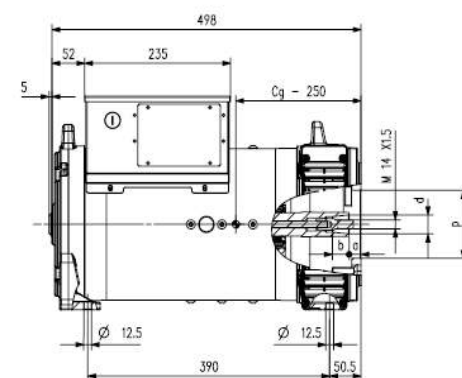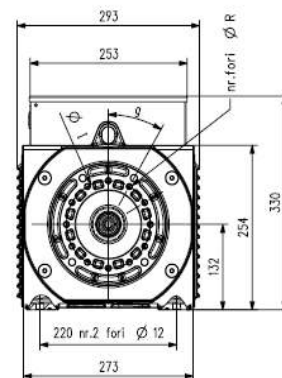

SAE5, SAE4, SAE3

disk joint	flange			L	G	l1	holes	R	S1
6,5	•	•	3	30,2	215,9	200	6	9	60°
7,5	•	•		30,2	241,3	222,2	8	9	45°
8	•	•		62	263,5	244,5	6	11	60°
10	•	•		53,8	314,3	295,3	8	11	45°
11,5	•	•		39,6	352,4	333,4	8	11	45°
P	314,3	362	409,6						
Q	358	405	452						
I	333,4	381	428,6						
R1	11	11	11						
S	22° 30	15°	15°						
holes	8	12	12						

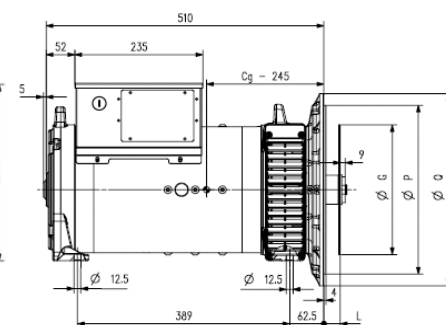

EES Energie-Erzeugung-Systeme GmbH

Gartenfelder Str. 29-37 / Geb. 39, Workbox 6,

13599 Berlin, Germany

T: +49 30 70016272

contact@eesystem.de